




M415D-12V

Water Heaters - M-415

M-415 Features Include:

- Heavy-duty, horizontally mounted 3/4" schedule 80 heat exchanger
- Standard 12 volt DC or optional 120 volt AC
- Honeywell Protectorelay® with flame monitoring burner control
- Rotary gear type pump with stainless steel shaft
- Inline temperature gauge with adjustable tank temperature control and pressure gauge
- Electrical controls with on/off switch for water circulation pump and burner
- Stainless steel or brass fittings, valves, and plumbing on inlet and outlet of coil and pump

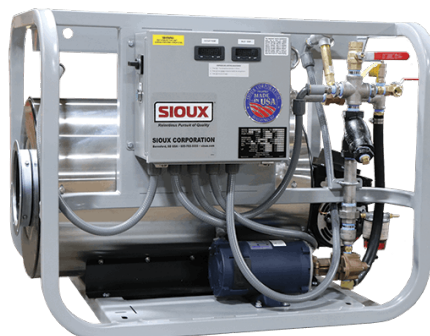

Electrical & Mechanical Information

Voltage	Circuit Rating Amps	Heat Input BTU/Hr
12	50	505,000

Connections

Water Inlet	Water Outlet	Fuel Inlet	Flue Size
3/4" NPT	1" NPT	3/8" NPT	8"

Performance

Heat Output BTU/Hr	Minimum Water Flow Rate	Maximum Water Flow Rate	Max Achievable Water Tank Temperature
415,000	9	9	150

Fuel Supply

Fuel Type	Fuel Usage
Diesel	3.6 GPH

Weight & Dimensions

Length		Width		Height	
in	mm	in	mm	in	mm
45	1143	32	813	31	790
Weight			580 (lbs), 263 (kgs)		

For More Info Visit sioux.com

Sioux Corporation, Copyright 2021 - Subject to change without notice